


HS-25 Series Data


플랜지형 볼밸브 0.98MPa(10K)
 : 15A~400A [0.98MPa(10K) FULL PORT]

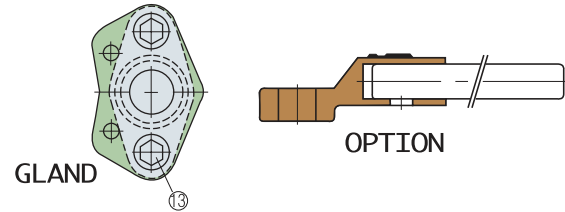

Parts of Material

재질 : 스텐304/316/주강/덕타일

NO	PART NAME	MATERIAL	
1	BODY	SCPH 2/FCD 450	SSC 13/14
2	CAP	SCPH 2/FCD 450	SSC 13/14
3	BALL	SSC 13, STS 304	SSC 13/14
4	SEAT	RTFE	RTFE
5	STEM	STS 304,S45C	STS 304/316
6	PACKING	PTFE	PTFE
7	BACK SEAT	PTFE	PTFE
8	RETAINER	CS+ENP	CS+ENP
9	GLAND	STS 304	STS 304
10	STOPPER	STS 304	STS 304
11	LEVER	Ductile iron	Ductile iron
12	SNAP RING	SK5M+ENP	SK5M+ENP
13	GLAND BOLT	SCM 435	SCM 304
14	GASKET	PTFE	PTFE
15	HEX BOLT	SCM 435	SCM 304
	GEAR BOX UNIT	HWA SUNG Stnadard(200A and larger)	

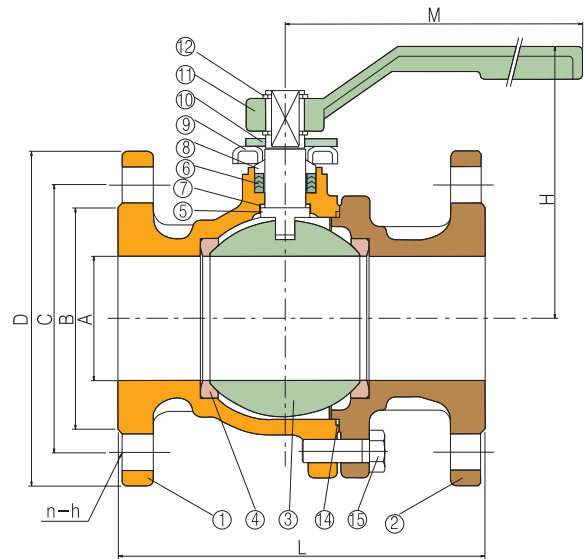

Dimension

UNIT : mm

Valve Size	A	B	C	D	H	L	M	n-h	Weight (Kg)
15A	15	51	70	95	82	108	130	4-Ø15	
20A	20	56	75	100	85	117	130	4-Ø15	
25A	25	67	90	125	99	127	160	4-Ø19	
32A	32	76	100	135	103	140	160	4-Ø19	
40A	40	81	105	140	125	165	240	4-Ø19	
50A	50	96	120	155	133	178	240	4-Ø19	
65A	65	116	140	175	142	190	240	4-Ø19	
80A	80	126	150	185	174	203	240	8-Ø19	
100A	100	151	175	210	187	229	350	8-Ø19	
125A	125	182	210	250	205	356	350	8-Ø23	
150A	150	212	240	280	271	394	440	8-Ø23	
200A	200	262	290	330	360	457	380	12-Ø23	
250A	250	324	355	400	435	533	380	12-Ø25	
300A	300	368	400	445	460	610	380	16-Ø25	
350A	337	413	445	490	573	686	600	16-Ø25	
400A	387	475	510	560	626	762	600	16-Ø27	

Features:

- Blow Out Proof Stem
- Locking Device
- Lower break-away torque

Applicable Standards:

- Face-to-face Dimensions:KS B2308
- End Flange Dimensions:KS B1511
- Shell wall thickness:KS B2308
- Gearbox operated type:200A and larger

· Specification is subject to change without prior notice due to function improvement.
 · 본 제품은 품질개선을 위해 사전 예고없이 변경될 수 있습니다.