


PRESSURE REGULATOR


ADJUSTABLE (MEDIUM PRESSURE) TYPE

50 & 70kg/h

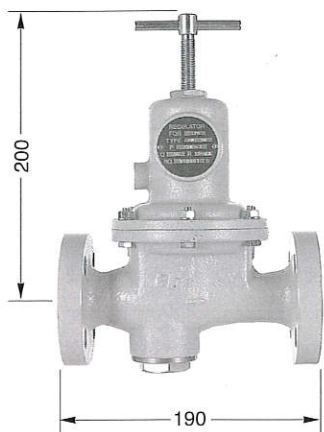

KM-50 & KM-70

100kg/h

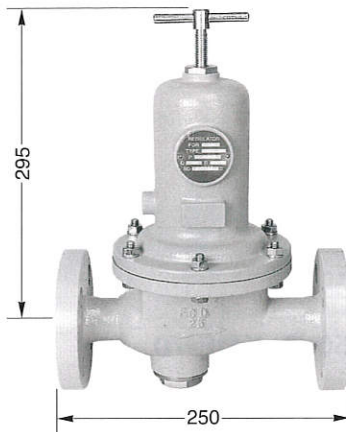


KM-100

SPECIFICATIONS

MODEL NO.	KM-50	KM-70	KM-100
CAPACITY Q	50kg/h	70kg/h	100kg/h
INLET PRESSURE P ₁	1.7~15.6kgf/cm ² (0.17~1.56MPa)		
DELIVERY PRESSURE P ₂	0.3~1.5kgf/cm ² (30~150kPa)		
INLET CONNECTION	3/4" (20A) 20K FLANGED		1" (25A) 20K FLANGED
OUTLET CONNECTION	3/4" (20A) 20K FLANGED		1" (25A) 20K FLANGED

SECOND STAGE TYPE

5kg/h

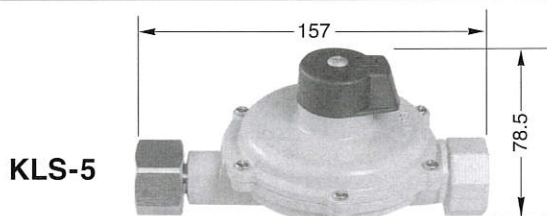


KLS-5

10kg/h



KLS-10

20kg/h

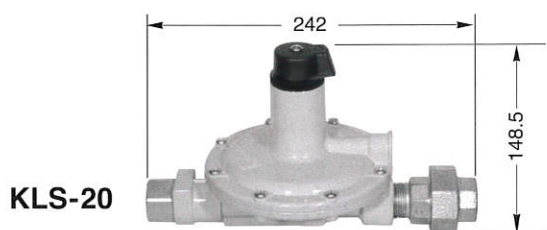

KLS-20

30kg/h



KLS-30

SPECIFICATIONS

MODEL NO.	KLS-5	KLS-10	KLS-20	KLS-30
CAPACITY Q	5kg/h	10kg/h	20kg/h	30kg/h
INLET PRESSURE P ₁	0.25~1.0kgf/cm ² (25~100kPa)			
DELIVERY PRESSURE P ₂	280±50mmH ₂ O (2.8±0.5kPa)			
INLET CONNECTION	Rc 1/2" (15A) FEMALE SCREWED			
OUTLET CONNECTION	Rc 1/2" (15A) FEMALE SCREWED	Rc 3/4" (20A) FEMALE LOW PRESSURE UNION		Rc 1" (25A) FEMALE LOW PRESSURE UNION
PRESSURE FOR ACTIVATING RELIEF VALVE	700±140mmH ₂ O (7±1.4kPa)			